
PREDICTED ENERGY ASSESSMENT



Plot 216, 2 Bed, 1B, 0ES, Honiton, Devon Dwelling type: Date of assessment: Produced by: Total floor area: Flat, Semi-Detached 14/08/2019 Kieran Davies 68.46 m²


This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.

The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO_2) emissions.

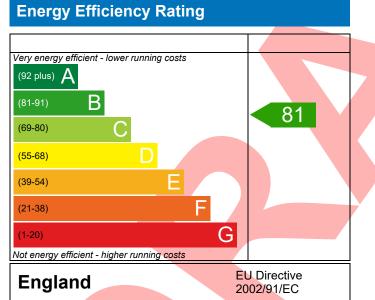

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

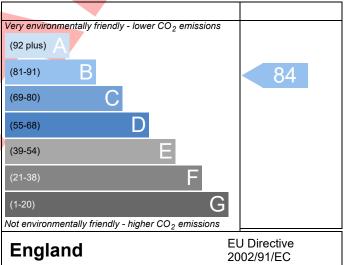

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO_2) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Page 1 of 4

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Reference							
Property	Plot 216, 2 Bed, 2	LB, OES, Honi	ton, Devo	n			
SAP Rating			81 B	DER	21.73	TER	23.64
Environmental			84 B	% DER <ter< td=""><td></td><td>8.09</td><td></td></ter<>		8.09	
CO₂ Emissions (t/yea	ar)		1.24	DFEE	61.43	TFEE	73.24
General Requiremen	ts Compliance		Pass	% DFEE <tfe< td=""><td></td><td>16.12</td><td></td></tfe<>		16.12	
	Miss Lindsey Dean, L Lindsey.dean@aessc	-	, Tel: 0188	34 242050,		Assessor ID	T716-0001
Client	Baker Estates						
JMARY FOR INPUT	DATA FOR New Build	d (As Design	ed)				
riterion 1 – Achievin	ng the TER and TFEE	rate					
a TER and DER							
Fuel for main heat	ing		Mains g	as			
Fuel factor			1.00 (ma	ains gas)			
Target Carbon Dio	xide Emission Rate (TER)	23.64			kgCO ₂ /m ²	
Dwelling Carbon D	oioxide Emission Rate	e (DER)	21.73			kgCO ₂ /m ²	Pass
			-1.91 (-8	3.1%)		kgCO ₂ /m ²	
D TFEE and DFEE							
Target Fabric Ener	gy Efficiency (TFEE)		73.24			kWh/m²/yr	
Dwelling Fabric En	ergy Efficiency (DFE	E)	61.43			kWh/m²/yr	
			-11.8 (-1	.6.1%)		kWh/m²/yr	Pass
riterion 2 – Limits oi	n design flexibility						
Limiting Fabric Sta	andards						
2 Fabric U-values							
Element		Average			Highest		
External wa	all	0.21 (ma	x. 0.30)		0.21 (max. 0.7	(0)	Pass
Party wall		0.00 (ma:			-	,	Pass
Floor		0.12 (ma			0.15 (max. 0.7	(0)	Pass
Roof		0.11 (ma:	,		0.11 (max. 0.3	,	Pass
Openings		1.38 (ma			1.40 (max. 3.3		Pass
2a Thermal bridgi	ng		/		- (- /	
	ng calculated from li	near therma	l transmit	tances for each	iunction		
<u>3 Air permeability</u>	-		i ti anonini		Junetion		
			E 00 / -! -			m ³ //h m ²) @ 50.5	
Air permeabilit	ty at 50 pascals			sign value)		$m^{3}/(h.m^{2}) = 50 Pa$	
N A			10.0] m³/(h.m²) @ 50 Pa	Pass
Maximum Limiting System E	<i>.</i>						

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas	Pass
	Data from database	
	Ideal LOGIC COMBI ESP1 35	
	Combi boiler Efficiency: 89.6% SEDBUK2009	
	Minimum: 88.0%	
Secondary heating system	None	
5 Cylinder insulation		
Hot water storage	No cylinder	
<u>6 Controls</u>		
Space heating controls	Time and temperature zone control	Pass
Hot water controls	No cylinder	
Boiler interlock	Yes	Pass
7 Low energy lights		
Percentage of fixed lights with low-energy fittings	100 %	
Minimum	75 %	Pass
8 Mechanical ventilation		
Not applicable		
	mmer	
iterion 3 – Limiting the effects of heat gains in su	mmer	
iterion 3 – Limiting the effects of heat gains in su	mmer Not significant	Pass
riterion 3 – Limiting the effects of heat gains in sur Summertime temperature Overheating risk (South West England)		Pass
riterion 3 – Limiting the effects of heat gains in sur Summertime temperature Overheating risk (South West England)		Pass
riterion 3 – Limiting the effects of heat gains in sur Summertime temperature Overheating risk (South West England) ased on:	Not significant	Pass
riterion 3 – Limiting the effects of heat gains in sur Summertime temperature Overheating risk (South West England) ased on: Overshading	Not significant Average	Pass
riterion 3 – Limiting the effects of heat gains in sur <u>Summertime temperature</u> Overheating risk (South West England) ased on: Overshading Windows facing South East	Not significant Average 6.00 m ² , No overhang	Pass
riterion 3 – Limiting the effects of heat gains in sur <u>Summertime temperature</u> Overheating risk (South West England) ased on: Overshading Windows facing South East Windows facing North West Air change rate Blinds/curtains	Not significant Average 6.00 m ² , No overhang 2.77 m ² , No overhang 3.00 ach None	Pass
 iterion 3 – Limiting the effects of heat gains in sur Summertime temperature Overheating risk (South West England) ased on: Overshading Windows facing South East Windows facing North West Air change rate Blinds/curtains riterion 4 – Building performance consistent with 	Not significant Average 6.00 m ² , No overhang 2.77 m ² , No overhang 3.00 ach None	Pass
riterion 3 – Limiting the effects of heat gains in sur Summertime temperature Overheating risk (South West England) ased on: Overshading Windows facing South East Windows facing North West Air change rate Blinds/curtains riterion 4 – Building performance consistent with Party Walls	Not significant Average 6.00 m², No overhang 2.77 m², No overhang 3.00 ach None DER and DFEE rate	Pass
iterion 3 – Limiting the effects of heat gains in sur Summertime temperature Overheating risk (South West England) ased on: Overshading Windows facing South East Windows facing North West Air change rate Blinds/curtains riterion 4 – Building performance consistent with Party Walls Type	Not significant Average 6.00 m², No overhang 2.77 m², No overhang 3.00 ach None DER and DFEE rate U-value	
iterion 3 – Limiting the effects of heat gains in sur Summertime temperature Overheating risk (South West England) ased on: Overshading Windows facing South East Windows facing North West Air change rate Blinds/curtains riterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing	Not significant Average 6.00 m², No overhang 2.77 m², No overhang 3.00 ach None DER and DFEE rate	Pass
Fiterion 3 – Limiting the effects of heat gains in sur Summertime temperature Overheating risk (South West England) ased on: Overshading Windows facing South East Windows facing North West Air change rate Blinds/curtains riterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing	Not significant Average 6.00 m², No overhang 2.77 m², No overhang 3.00 ach None DER and DFEE rate U-value	
iterion 3 – Limiting the effects of heat gains in sur Summertime temperature Overheating risk (South West England) ased on: Overshading Windows facing South East Windows facing North West Air change rate Blinds/curtains riterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability	Not significant Average 6.00 m², No overhang 2.77 m², No overhang 3.00 ach None DER and DFEE rate U-value 0.00 W/m²K	Pass
iterion 3 – Limiting the effects of heat gains in sur Summertime temperature Overheating risk (South West England) ised on: Overshading Windows facing South East Windows facing North West Air change rate Blinds/curtains iterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals	Not significant Average 6.00 m², No overhang 2.77 m², No overhang 3.00 ach None DER and DFEE rate U-value 0.00 W/m²K 5.00 (design value) m³/(h.m²) @ 50 F	 Pass
iterion 3 – Limiting the effects of heat gains in sur Summertime temperature Overheating risk (South West England) ased on: Overshading Windows facing South East Windows facing North West Air change rate Blinds/curtains iterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals Maximum	Not significant Average 6.00 m², No overhang 2.77 m², No overhang 3.00 ach None DER and DFEE rate U-value 0.00 W/m²K	 Pass
iterion 3 – Limiting the effects of heat gains in sur Summertime temperature Overheating risk (South West England) ased on: Overshading Windows facing South East Windows facing North West Air change rate Blinds/curtains iterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals Maximum D Key features	Not significant Average 6.00 m², No overhang 2.77 m², No overhang 3.00 ach None DER and DFEE rate U-value 0.00 W/m²K 5.00 (design value) m³/(h.m²) @ 50 F 10.0 m³/(h.m²) @ 50 F	 Pass
iterion 3 – Limiting the effects of heat gains in sur Summertime temperature Overheating risk (South West England) ased on: Overshading Windows facing South East Windows facing North West Air change rate Blinds/curtains Titerion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals Maximum D Key features Party wall U-value	Not significant Average 6.00 m², No overhang 2.77 m², No overhang 3.00 ach None DER and DFEE rate U-value 0.00 W/m²K 5.00 (design value) m³/(h.m²) @ 50 F 10.0 m³/(h.m²) @ 50 F 0.00 W/m²K	 Pas:
Summertime temperature Overheating risk (South West England) ased on: Overshading Windows facing South East Windows facing North West Air change rate Blinds/curtains Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals Maximum O Key features Party wall U-value Roof U-value	Not significant Average 6.00 m², No overhang 2.77 m², No overhang 3.00 ach None DER and DFEE rate U-value 0.00 W/m²K 5.00 (design value) m³/(h.m²) @ 50 F 10.0 m³/(h.m²) @ 50 F 0.00 W/m²K	 Pass
riterion 3 – Limiting the effects of heat gains in sur Summertime temperature Overheating risk (South West England) ased on: Overshading Windows facing South East Windows facing North West Air change rate Blinds/curtains riterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals Maximum D Key features Party wall U-value	Not significant Average 6.00 m², No overhang 2.77 m², No overhang 3.00 ach None DER and DFEE rate U-value 0.00 W/m²K 5.00 (design value) m³/(h.m²) @ 50 F 10.0 m³/(h.m²) @ 50 F 0.00 W/m²K	Pass

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



RECOMMENDATIONS





This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

